


REVISIONS


| DATE | DESCRIPTION |
|------|-------------|
| | |
| | |

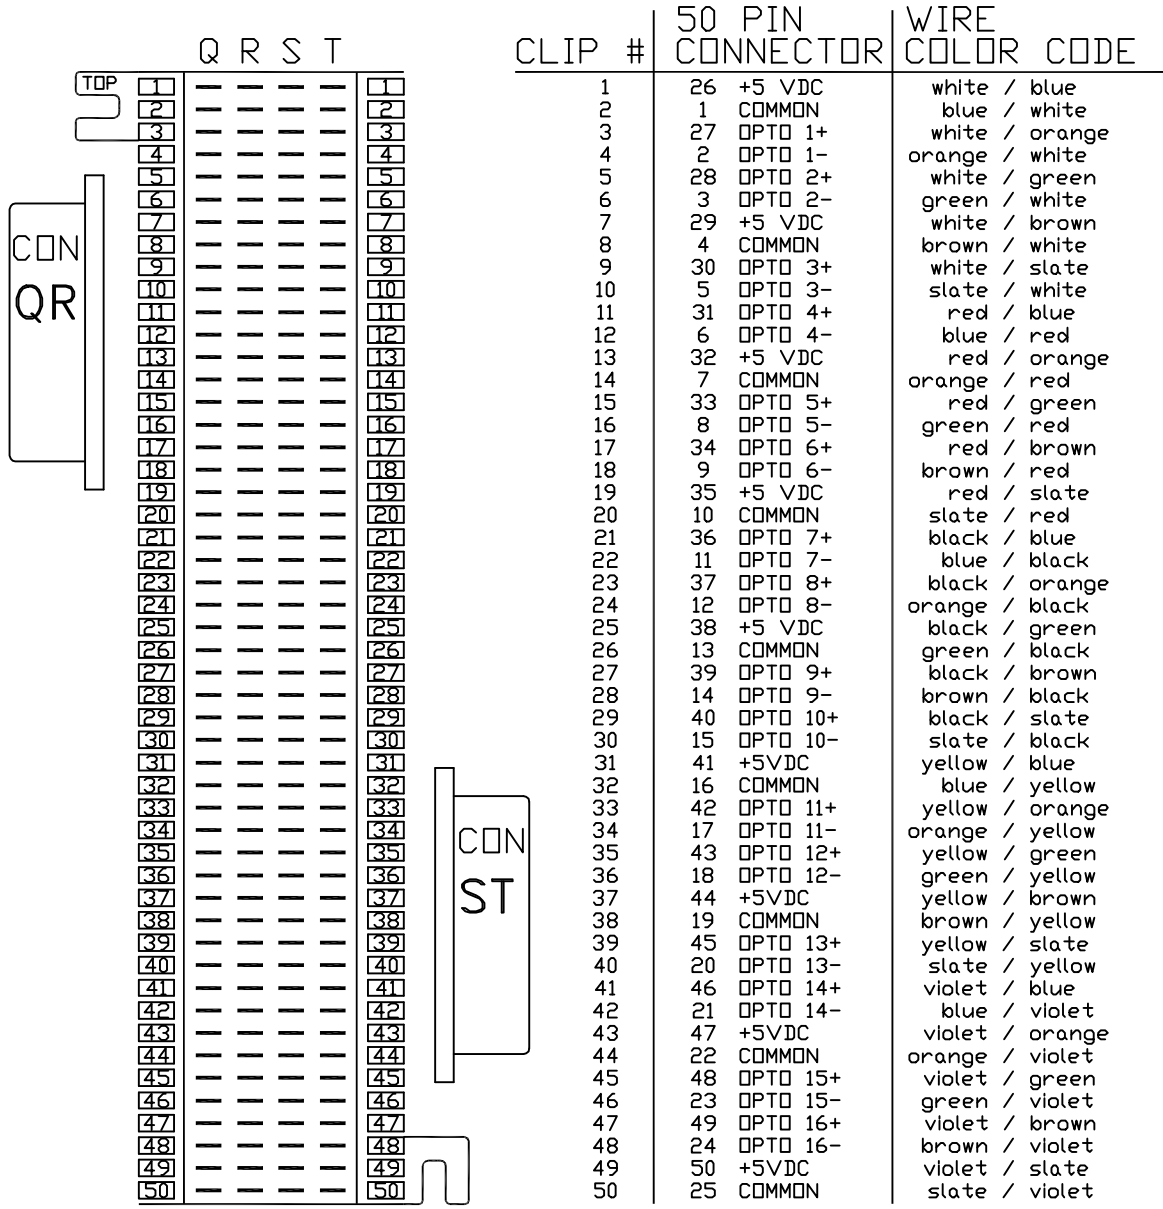

NOTES

1. EACH VERTICAL PUNCHBLOCK COLUMN IS WIRED TO ONE OF THE TWO 50 PIN CONNECTORS.
2. THE CLIP NUMBER ON THE CHART IDENTIFIES THE PUNCHBLOCK ROW.
3. THE CONNECTOR PIN NUMBER ON THE CHART IDENTIFIES THE PIN NUMBER OF THE ASSOCIATED CONNECTOR.

| | | |
|---|---|----------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | |
| TOLERANCES: | | |
| FRACTIONS ± 1/64 | DECIMALS .XX = ±0.015 .XXX = ±0.005 | ANGLES ± 2' |
| DRAWN | EOF | |
| CHECKED | | |
| APPROVED | | |
| DATE | 11/07/02 | |



Sierra Automated Systems

SAS 50 PIN RJ-21 / 66 BLOCK - OPTOS CONNECTOR/PUNCHBLOCK WIRING DIAGRAM

| | | |
|--------------|---|-------|
| SHEET 1 OF 1 | A | 16BW2 |
|--------------|---|-------|